# How to Configure a Lista Storage Wall® System



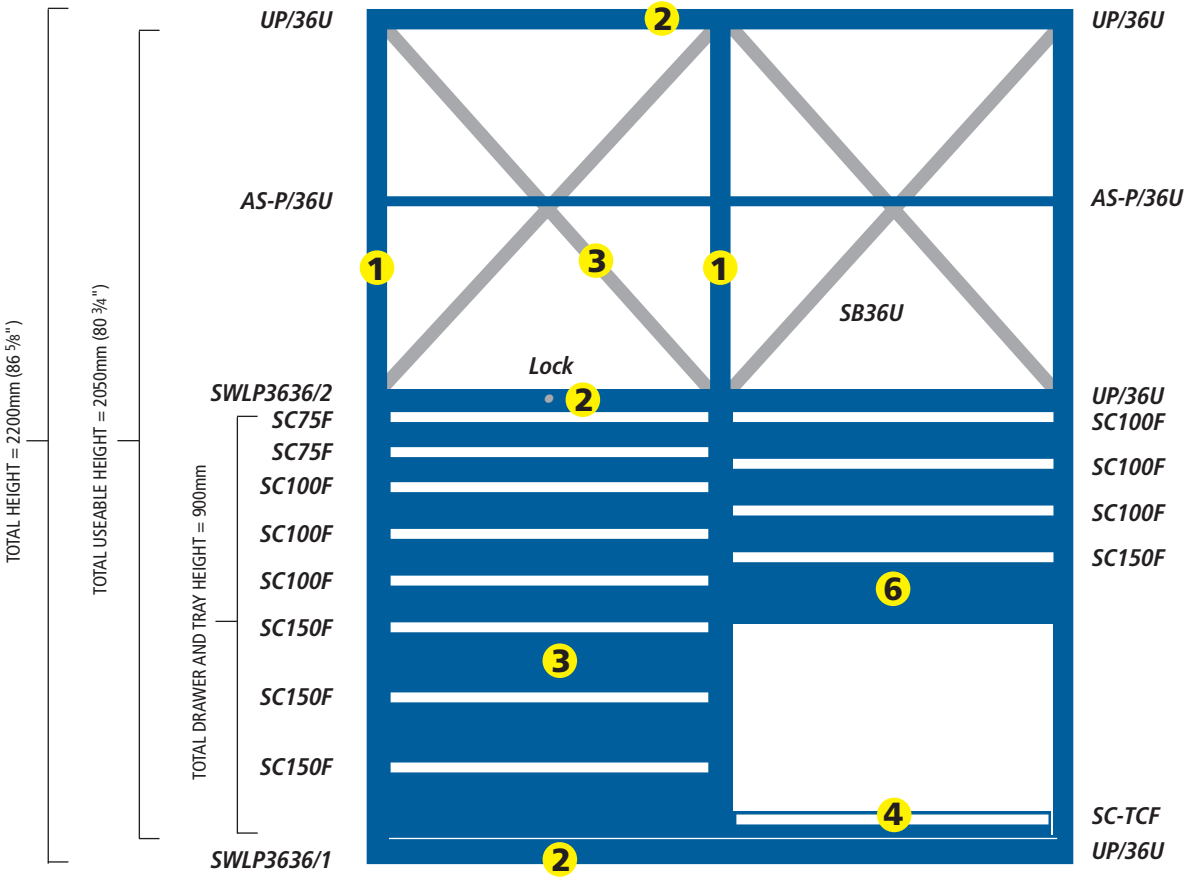


These are the basic steps required for configuring Lista Storage Wall Systems.

**Sample Full Depth Storage Wall Order**

| QUANTITY | PART NO. | DESCRIPTION | |
|---|---|---|---|
| 3 | VSF2200 | vertical side frames | 1 |
| 4 | UP/36U | universal panels | 2 |
| 1 | SWLP3636/1 | lock panel | 2 |
| 1 | SWLP3636/2 | lock panel | 2 |
| 1 | SWLK900-RG | lock system | 2 |
| 2 | SB36U | sway braces (pairs) | 3 |
| 2 | SC75F | drawers | 4 |
| 6 | SC100F | drawers | 4 |
| 4 | SC150F | drawers | 4 |
| 1 | SC-TCF | roll-out tray | 4 |
| 2 | AS-P/36U | adjustable shelves | 4 |
| | BB | bright blue paint | 6 |

## 1 Select vertical side frames

Select the vertical side frames. Keep in mind the depth and height of the system you are designing. See page 2 for full depth systems and page 4 for shallow depth systems.

## 2 Select universal panels and optional lock system panels

Select panel, which determines the width of the section. See page 6 for locking system choices.

## 3 Select rear and end panels

Select rear panel or sway braces and optional end panels. See page 2 for full depth systems and page 4 for shallow depth systems.

## 4 Select drawers, shelves and roll-out trays

Select the correct-sized drawers, shelves and roll-out trays for the system you are designing. See page 3 for full depth system components and page 5 for shallow depth system components.

## 5 Select system options

Select doors, bookcases and/or ladders from the options shown on pages 7-9.

## 6 Select paint colors

Select color(s) from the color chart below. System frame and panels can be a different color from drawer fronts, but drawer interiors are always gray.

LISTA

BE (Beige paint) | BB (Bright Blue paint) | BK (Black paint) | CB (Classic Blue paint)
GR (Dark Gray paint) | GG (Green paint) | LG (Light Gray paint) | NR (Red paint)
SN (Sand paint) | FW (White paint)

Multi-Industriel A.D. Ltd. info@multi-industriel.com
Toll-free : 1-800-363-4463 Tel : 514-875-6604 Fax : 514-875-6664

# Full Depth Storage Wall® System (27 3/4" deep) – Frames and Panels



**Full depth Storage Wall sections (27 3/4" deep) come in three different widths. Panel/section widths correspond to Lista Standard, Mid- and Double Width components.**

**At any time, additional sections can be added, and drawers, roll-out trays, and shelves can be easily reconfigured to accommodate growth and changing needs.**

## Ordering

All basic components are ordered separately from the charts on these two pages. Be sure to match the width of the drawers, shelves, etc. to the section width you are building. For step-by-step directions for ordering, see page 1.

Please note that the final digits in the part numbers for universal panels, sway braces and rear panels indicate width in units:

- 36U for Standard Width
- 64U for Mid-Width
- 78U for Double Width

## Vertical Side Frames

Heavy duty one-piece vertical uprights with welded horizontal struts. Vertical uprights are slotted at 1" increments for placement of drawers, roll-out trays or shelves. Color: to match unit.

| PART NO. | OVERALL HT. | USABLE HT. |
|---|---|---|
| VSF1000 | 39 3/8" | 35 7/16" (900mm) |
| VSF1450 | 57 1/8" | 53 1/8" (1350mm) |
| VSF2000 | 78 3/4" | 74 3/4" (1900mm) |
| VSF2200 | 86 5/8" | 80 3/4" (2050mm) |
| VSF2500 | 98 7/16" | 92 1/2" (2350mm) |
| VSF3000 | 118 1/8" | 112 1/4" (2850mm) |

## Length of Storage Wall Systems

To determine actual Storage Wall length, add together the sections you are assembling and add an additional 2". If end panels are used, add 29/32" for each.

| SECTION WIDTH | LENGTH BETWEEN SIDE FRAME CTRS. |
|---|---|
| standard (36 units) | 28 1/8" (714mm) |
| mid-width (64 units) | 46 7/8" (1190mm) |
| double width (78 units) | 56 1/4" (1428mm) |

## End Panels

These optional steel sheet panels enclose the ends of the completed units. Hardware included. Color: to match unit.

| PART NO. | HEIGHT |
|---|---|
| EP1000 | 39 3/8" (1000mm) |
| EP1450 | 57 1/8" (1450mm) |
| EP2000 | 78 3/4" (2000mm) |
| EP2200 | 86 5/8" (2200mm) |
| EP2500 | 98 7/16" (2500mm) |
| EP3000 | 118 1/8" (3000mm) |

## Universal Panels

Steel sheet universal panels measure 2" (50mm) in height and are fastened to the top and bottom of the vertical side frames to complete each section. Sections with vertical side frames 2200 or greater must have a third intermediate universal panel. Fasteners are included. Color: to match unit. For panels that accept the lock system, see page 6.

### Universal Panels

| PART NO. | WIDTH | LOAD CAP. |
|---|---|---|
| UP/36U | 26" (661mm) | 550 lbs. (250kg) |
| UP/64U | 44 3/4" (1137mm) | 550 lbs. (250kg) |
| UP/78U | 54 1/8" (1375mm) | 550 lbs. (250kg) |

### Universal Panels with Mounting Holes

For use with counter tops, tambour doors (top panel only) and double hinged doors (top and bottom panel).

| PART NO. | WIDTH | LOAD CAP. |
|---|---|---|
| UP/36U-UM | 26" (661mm) | 550 lbs. (250kg) |
| UP/64U-UM | 44 3/4" (1137mm) | 550 lbs. (250kg) |
| UP/78U-UM | 54 1/8" (1375mm) | 550 lbs. (250kg) |

## Rear Panels

Panels are bolted to the vertical side frames to enclose the rear of each section and provide lateral stability. Rear panels must be fitted at least every fourth section. Fasteners included. Color: to match unit. Sway braces can be substituted.

| PART NO. | HEIGHT |
|---|---|
| **Standard width 28 1/8" (714mm) – 36 units** | |
| RP1000/36U | 39 3/8" (1000mm) |
| RP1450/36U | 57 1/8" (1450mm) |
| RP2000/36U | 78 3/4" (2000mm) |
| RP2200/36U | 86 5/8" (2200mm) |
| RP2500/36U | 98 7/16" (2500mm) |
| RP3000/36U | 118 1/8" (3000mm) |
| **Mid-width 46 7/8" (1190mm) – 64 units** | |
| RP1000/64U | 39 3/8" (1000mm) |
| RP1450/64U | 57 1/8" (1450mm) |
| RP2000/64U | 78 3/4" (2000mm) |
| RP2200/64U | 86 5/8" (2200mm) |
| RP2500/64U | 98 7/16" (2500mm) |
| RP3000/64U | 118 1/8" (3000mm) |
| **Double width 56 1/4" (1428mm) – 78 units** | |
| RP1000/78U | 39 3/8" (1000mm) |
| RP1450/78U | 57 1/8" (1450mm) |
| RP2000/78U | 78 3/4" (2000mm) |
| RP2200/78U | 86 5/8" (2200mm) |
| RP2500/78U | 98 7/16" (2500mm) |
| RP3000/78U | 118 1/8" (3000mm) |

## Sway Braces

Used for units without rear panels to provide the necessary lateral stability. Diagonal braces must be fitted at least every fourth section. Color: to match unit. Supplied in pairs with fasteners included.

| PART NO. | WIDTH |
|---|---|
| SB36U | 28 1/8" (714mm) |
| SB64U | 46 7/8" (1190mm) |
| SB78U | 56 1/4" (1428mm) |

## Roll-Out Trays

Roll-out trays can be mounted in any sequence or combination with drawers and shelves. Each tray uses the equivalent height of a 100 drawer (100mm high). Trays have full length handles, galvanized insert panels, and 1 3/4" rear and side retaining walls. Be sure to order trays to match the particular section width you are outfitting.

- Usable depth of tray is 24".
- Weight capacity is 440 lbs. for evenly distributed loads.

| PART NO. | SECTION | USABLE WIDTH |
|---|---|---|
| SC-TCF | 36U (standard) | 24" (610mm) |
| MW-TCF | 64U (mid-width) | 42 13/16" (1088mm) |
| DW-TCF | 78U (double wid.) | 52 3/16" (1326mm) |

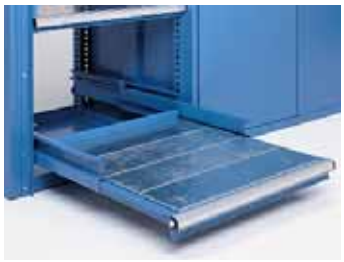

## Heavy Duty Roll-Out Tray

Trays have full length handles and galvanized insert panels. Each tray uses the equivalent height of a 225 drawer (225mm high). Available for standard width sections only. Use of individual drawer latch and retainer strip is required (see page 6).

- Usable depth of tray is 24".
- Weight capacity is 770 lbs. for evenly distributed loads.

| PART NO. | SECTION | USABLE WIDTH |
|---|---|---|
| HDTCF/SC | 36U (standard) | 23" (584mm) |

## Adjustable Shelves

Steel shelves can easily be moved at any time and used in any combination or sequence with drawers and roll-out trays. Shelves are 1" (25mm) high. Shelf support clips are included. Color: to match unit. Be sure to order shelves to match the particular section width you are outfitting.

- Usable depth of shelf is 27 1/2".
- Shelves have a 440 lb. maximum load capacity for evenly-distributed loads.

| PART NO. | SECTION | USABLE WIDTH |
|---|---|---|
| AS-P/36U | 36U (standard) | 26" (661mm) |
| AS-P/64U | 64U (mid-width) | 44 3/4" (1137mm) |
| AS-P/78U | 78U (double wid.) | 54 1/8" (1375mm) |

## Shelf Dividers

Steel sheet dividers fit over lip of shelf. Color: to match shelves.

| PART NO. | HEIGHT |
|---|---|
| SWSD100/36 | 4" (100mm) |
| SWSD150/36 | 6" (150mm)) |
| SWSD200/36 | 8" (200mm) |

## Self-Adhesive Label Holders

Plastic hinged label holder adheres to face of shelf to allow identification of shelf contents. 13/16" high. Does not include label paper. For Lista Script, use 18.932 labels.

| PART NO. | LENGTH |
|---|---|
| 18.926 | 4 1/8" (105mm) |
| 18.927 | 8 1/4" (210mm) |
| 18.929 | 39 3/8" (1000mm) |

## Shelf End Panels

Steel sheet panel, 26" long, provides side wall for shelves. Color: to match unit. Inserted without additional hardware.

| PART NO. | HEIGHT | MIN. SHELF SPACING |
|---|---|---|
| X684/3 | 5 15/16" (150mm) | 7 7/8" (200mm) |
| X684/5 | 7 7/8" (200mm) | 9 7/8" (250mm) |
| X684/7 | 9 7/8" (250mm) | 11 3/4" (300mm) |

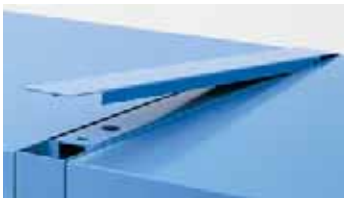

## Frame Top Fill-In Strip

Steel sheet strip, covers top of vertical side frames to create a smooth continuous surface. Not for use with sliding doors or vertical tambour doors. Color: to match unit.

| PART NO. |
|---|
| X699 |

## Intermediate Fill-In Strip

Steel sheet strip fills the space created by vertical side frames between shelves or universal panels to create a smooth continuous shelf surface. Must be used between 2 shelves or 2 universal panels. Color: to match unit. Retainer clip included.

| PART NO. |
|---|
| X700 |

**Shallow depth Storage Wall sections (21 3/4" deep) come in two different widths. Panel/section widths correspond to Lista ST and HS Width components.**

**At any time, additional sections can be added, and drawers, roll-out trays, and shelves can be easily reconfigured to accommodate growth and changing needs.**

## Ordering

All basic components are ordered separately from the charts on these two pages. Be sure to match the width of the drawers, etc. to the section width you are building. For step-by-step directions for ordering, see page 1.

Please note that the final digits in the part numbers for universal panels, sway braces and rear panels indicate width in units:

- 36U for ST Width
- 54U for HS Width

## Vertical Side Frames

Heavy duty one-piece vertical uprights with welded horizontal struts. Vertical uprights are slotted at 1" increments for placement of drawers, roll-out trays or shelves. Color: to match unit.

| PART NO. | OVERALL HEIGHT | USABLE HEIGHT |
|---|---|---|
| VSF1000/B255 | 39 3/8" | 35 7/16" (900mm) |
| VSF1450/B255 | 57 1/8" | 53 1/8" (1350mm) |
| VSF2000/B255 | 78 3/4" | 74 3/4" (1900mm) |
| VSF2200/B255 | 86 5/8" | 80 3/4" (2050mm) |
| VSF2500/B255 | 98 7/16" | 92 1/2" (2350mm) |
| VSF3000/B255 | 118 1/8" | 112 1/4" (2850mm) |

## Length of Storage Wall Systems

To determine actual Storage Wall length, add together the sections you are assembling and add an additional 2". If end panels are used, add 29/32" for each.

| SECTION WIDTH | LENGTH BETWEEN SIDE FRAME CTRS. |
|---|---|
| ST (36 units) | 28 1/8" (714mm) |
| HS (54 units) | 40 5/32" (1020mm) |

## End Panels

These optional panels enclose the ends of the completed units. Hardware included.
Color: to match unit.

| PART NO. | HEIGHT |
|---|---|
| EP1000/B255 | 39 3/8" (1000mm) |
| EP1450/B255 | 57 1/8" (1450mm) |
| EP2000/B255 | 78 3/4" (2000mm) |
| EP2200/B255 | 86 5/8" (2200mm) |
| EP2500/B255 | 98 7/16" (2500mm) |
| EP3000/B255 | 118 1/8" (3000mm) |

## Universal Panels

Steel sheet universal panels measure 2" (50mm) in height and are fastened to the top and bottom of the vertical side frames to complete each section. Sections with vertical side frames 2200 or greater must have a third intermediate universal panel. Fasteners are included. Color: to match unit. For panels that accept the lock system, see page 6.

### Universal Panels

| PART NO. | WIDTH | LOAD CAPACITY |
|---|---|---|
| UP/3627U | 26" (661mm) | 550 lbs. (250kg) |
| UP/54U | 38" (967mm) | 550 lbs. (250kg) |

### Universal Panels with Mounting Holes

For use with counter tops, tambour doors (top panel only) and double hinged doors (top and bottom panel).

| PART NO. | WIDTH | LOAD CAPACITY |
|---|---|---|
| UP/3627U-UM | 26" (661mm) | 550 lbs. (250kg) |
| UP/54U-UM | 38" (967mm) | 550 lbs. (250kg) |

## Rear Panels

Panels are bolted to the vertical side frames to enclose the rear of each section and provide lateral stability. Rear panels must be fitted at least every fourth section. Fasteners included. Color: to match unit. Sway braces can be substituted.

| PART NO. | HEIGHT |
|---|---|
| **ST width 28 1/8" (714mm) – 36 units** | |
| RP1000/36U | 39 3/8" (1000mm) |
| RP1450/36U | 57 1/8" (1450mm) |
| RP2000/36U | 78 3/4" (2000mm) |
| RP2200/36U | 86 5/8" (2200mm) |
| RP2500/36U | 98 7/16" (2500mm) |
| RP3000/36U | 118 1/8" (3000mm) |
| **HS width 40 1/8" (1020mm) – 54 units** | |
| RP1000/54U | 39 3/8" (1000mm) |
| RP1450/54U | 57 1/8" (1450mm) |
| RP2000/54U | 78 3/4" (2000mm) |
| RP2200/54U | 86 5/8" (2200mm) |
| RP2500/54U | 98 7/16" (2500mm) |
| RP3000/54U | 118 1/8" (3000mm) |

## Sway Braces

Used for units without rear panels to provide the necessary lateral stability. Diagonal braces must be fitted at least every fourth section. Color: to match unit. Supplied in pairs with fasteners included.

| PART NO. | WIDTH |
|---|---|
| SB36U | 28 1/8" (714mm) |
| SB54U | 40 1/8" (1020mm) |

## Roll-Out Trays

Roll-out trays can be mounted in any sequence or combination with drawers and shelves. Each tray uses the equivalent height of a 100 drawer (100mm high). Trays have full length handles, galvanized insert panels, and 1 3/4" rear and side retaining walls. Be sure to order trays to match the particular section width you are outfitting.

- Usable depth of tray is 18".
- Weight capacity is 440 lbs. for evenly distributed loads.

| PART NO. | SECTION | USABLE WIDTH |
|---|---|---|
| ST-TCF | 36U (ST) | 24" (610mm) |
| HS-TCF | 54U (HS) | 36 1/8" (918mm) |

## Heavy Duty Roll-Out Tray

Trays have full length handles and galvanized insert panels. Each tray uses the equivalent height of a 225 drawer (225mm high). Available for HS width sections only. Use of individual drawer latch and retainer strip is required (see page 6).

- Usable depth of tray is 18".
- Weight capacity is 770 lbs. for evenly distributed loads.

| PART NO. | SECTION | USABLE WIDTH |
|---|---|---|
| HDTCF/HS | 54U (HS) | 35 1/8" (892mm) |

## Adjustable Shelves

Steel shelves can easily be moved at any time and used in any combination or sequence with drawers and roll-out trays. Shelves are 1" (25mm) high. Shelf support clips are included. Color: to match unit. Be sure to order shelves to match the particular section width you are outfitting.

- Usable depth of shelf is 21 3/4".
- Weight capacity is 440 lbs. for evenly distributed loads.

| PART NO. | SECTION | USABLE WIDTH |
|---|---|---|
| AS-P/3627U | 36U (ST) | 26" (661mm) |
| AS-P/54U | 54U (HS) | 38" (967mm) |

## Shelf Dividers

Steel sheet dividers fit over lip of shelf. Color: to match shelves.

| PART NO. | HEIGHT |
|---|---|
| SWSD100/27 | 4" (100mm) |
| SWSD150/27 | 6" (150mm) |
| SWSD200/27 | 8" (200mm) |

## Self-Adhesive Label Holders

Plastic hinged label holder adheres to face of shelf to allow identification of shelf contents. 13/16" high. Does not include label paper. For Lista Script, use 18.932 labels.

| PART NO. | LENGTH |
|---|---|
| 18.926 | 4 1/8" (105mm) |
| 18.927 | 8 1/4" (210mm) |
| 18.929 | 39 3/8" (1000mm) |

## Shelf End Panels

Steel sheet panel provides side wall for shelves. Color: to match unit. Inserted without additional hardware.

| PART NO. | HEIGHT | MIN. SHELF SPACING |
|---|---|---|
| X612/03 | 5 15/16" (150mm) | 7 7/8" (200mm) |
| X612/05 | 7 7/8" (200mm) | 9 7/8" (250mm) |
| X612/07 | 9 7/8" (250mm) | 11 3/4" (300mm) |

## Frame Top Fill-In Strip

Steel sheet strip, covers top of vertical side frames to create a smooth continuous surface. Not for use with sliding doors or vertical tambour doors. Color: to match unit.

| PART NO. |
|---|
| X611 |

## Intermediate Fill-In Strip

Steel sheet strip fills the space created by vertical side frames between shelves or universal panels to create a smooth continuous shelf surface. Must be used between 2 shelves or 2 universal panels. Color: to match unit. Retainer clip included.

| PART NO. |
|---|
| X610 |

Multi-Industriel A.D. Ltd. info@multi-industriel.com
Toll-free : 1-800-363-4463 Tel : 514-875-6604 Fax : 514-875-6664

# Storage Wall® Drawer Locking Systems

For a variety of security needs, Lista offers individual, keyed-alike or master key locking systems for drawer sections. If you wish to lock and secure sections made up of a combination of drawers, roll-out trays and/or shelves, choose from the doors shown on pages 8-9.

### How to order a lock system

1. **Select the appropriate size and type of panels** needed to match the Storage Wall section you are building. See the illustrations to the right to find the panels needed for the configuration you have chosen (partial or full height section).

2. **Select the appropriate lock system** based on the configuration you have chosen (partial or full height section). See ordering example on page 1.

3. ■ **Select lock type.**
   **RG** = individual
   **KA** = keyed-alike
   **MA** = master

**EXAMPLE:** to lock a 2200 height Standard Width (36 unit wide) Storage Wall section containing a 900 height group of drawers below the lock and a 1300 height group of drawers above the lock with an individual lock, you would need to order (1) **SWLP3636/1** panel at the bottom, (1) **SWLP3636/2** panel at the top and (1) **SWLP3636/3** panel at the center, and an **SWLK2200-RG** lock system.

## Panels for Lock System

Same basic construction as universal panels but equipped for installation of lock system. Color: to match unit.

### Full Depth Storage Wall System

| PART NO. | USABLE WID. | LOAD CAP. |
|---|---|---|
| **Standard width – 36 units** | | |
| SWLP3636/1 | 26" (661mm) | 440 lbs. (200kg) |
| SWLP3636/2 | 26" (661mm) | 440 lbs. (200kg) |
| SWLP3636/3 | 26" (661mm) | 440 lbs. (200kg) |
| **Mid-width – 64 units** | | |
| SWLP6436/1 | 44 3/4" (1137mm) | 440 lbs. (200kg) |
| SWLP6436/2 | 44 3/4" (1137mm) | 440 lbs. (200kg) |
| SWLP6436/3 | 44 3/4" (1137mm) | 440 lbs. (200kg) |
| **Double width – 78 units** | | |
| SWLP7836/1 | 54 1/8" (1375mm) | 440 lbs. (200kg) |
| SWLP7836/2 | 54 1/8" (1375mm) | 440 lbs. (200kg) |
| SWLP7836/3 | 54 1/8" (1375mm) | 440 lbs. (200kg) |

### Shallow Depth Storage Wall System

| PART NO. | USABLE WID. | LOAD CAP. |
|---|---|---|
| **ST width – 36 units** | | |
| SWLP3627/1 | 26" (661mm) | 440 lbs. (200kg) |
| SWLP3627/2 | 26" (661mm) | 440 lbs. (200kg) |
| SWLP3627/3 | 26" (661mm) | 440 lbs. (200kg) |
| **HS width – 54 units** | | |
| SWLP5427/1 | 38" (967mm) | 440 lbs. (200kg) |
| SWLP5427/2 | 38" (967mm) | 440 lbs. (200kg) |
| SWLP5427/3 | 38" (967mm) | 440 lbs. (200kg) |

## Lock Systems

For locking a partial height section of drawers. Locks all drawers located below the lock.

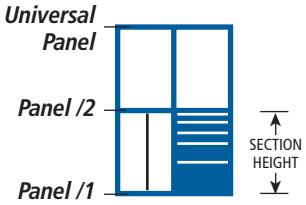


| PART NO. | DRAWER SECTION HEIGHT |
|---|---|
| SWLK300-■ | 11 3/4" (300mm) |
| SWLK600-■ | 23 9/16" (600mm) |
| SWLK750-■ | 29 9/16" (750mm) |
| SWLK900-■ | 35 7/16" (900mm) |
| SWLK1050-■ | 41 5/16" (1050mm) |
| SWLK1225-■ | 48 1/4" (1225mm) |
| SWLK1350-■ | 53 3/16" (1350mm) |
| SWLK1525-■ | 60" (1525mm) |

## Lock Systems for Full Height Drawer Section

For Storage Wall section that contains only drawers top-to-bottom. Locks all drawers located above and below the lock. **Lower section must be 900 height.**

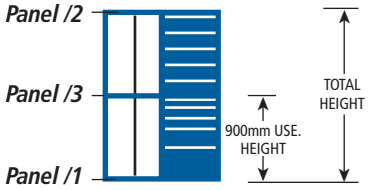


| PART NO. | STORAGE WALL TOTAL HT. |
|---|---|
| SWLK2000-■ | 74 3/4" (1900mm) |
| SWLK2200-■ | 80 3/4" (2050mm) |
| SWLK2500-■ | 92 1/2" (2350mm) |
| SWLK3000-■ | 112 1/4" (2850mm) |

*Retainer strip*

## Individual Drawer Latch (IDL)

Individual drawer latches lock drawers and roll-out trays closed. Particularly suitable for mobile applications or where seismic activity is a consideration. Finger pull latches are recessed and mounted on the right side of the drawer handle. Can be added at any time. Requires retainer strip (ordered separately – see below).

| PART NO. |
|---|
| IDL |

## Retainer Strips

Strips bolt to vertical side frame to secure individual drawer latches. **These strips are necessary for IDLs.**

| PART NO. | HEIGHT |
|---|---|
| VP-IDL/1000 | 39 3/8" (1000mm) |
| VP-IDL/1450 | 57 1/8" (1450mm) |
| VP-IDL/2000 | 78 3/4" (2000mm) |
| VP-IDL/2200 | 86 5/8" (2200mm) |
| VP-IDL/2500 | 98 7/16" (2500mm) |
| VP-IDL/3000 | 118 1/8" (3000mm) |

## Lock-In-Lock-Out (LILO)

These safety devices lock drawers in fully opened or fully closed positions. LILO is primarily used in mobile applications or where seismic activity is a consideration. Part number is for individual LILO device only; drawers must be ordered separately. Only available for 440 lb. (200kg) suspension drawers.

| PART NO. |
|---|
| LILO |

These offerings make your Storage Wall System even more versatile. The bookcase and counter top are available for both full depth and shallow depth Storage Wall Systems.

## Bookcases

Overhead bookcase offers quick access to reference materials and manuals. Bookcase is 12 5/8" deep, with a useable depth of 11 7/8". Color: to match unit.

| PART NO. | FOR USE WITH | USE. WIDTH |
|---|---|---|
| BC36U | full and shallow depth | 25 7/8" |
| BC54U | shallow depth | 37 7/8" |
| BC64U | full depth | 44 1/2" |
| BC78U* | full and shallow depth | 54" |

**for (1) 78U or (2) 36U*

## Butcher Block Counter Tops

Counter style worktop is 1 3/4" thick butcher block hardwood. Mounts on top of universal panel with mounting holes (see pages 2 and 4).

| PART NO. | FOR USE WITH |
|---|---|
| BCT/3627U | shallow depth |
| BCT/3636U | full depth |
| BCT/5427U | shallow depth |
| BCT/6436U | full depth |
| BCT/7836U | full depth |

## Track-Guided Folding Safety Ladders

Without sacrificing aisle space, safe, secure and easy access to upper levels is provided by our track-guided folding ladder. Ladder can pivot to right or left so any section is within easy reach. Broad wooden steps, a sturdy handrail, and a hand brake are features engineered for safety. Available in our bright yellow safety color only.

- minimum aisle width to accommodate ladder is 35 1/2"
- not recommended for use with Double Width drawers
- **tracks must be ordered separately (see below)**

| PART NO. | MIN. ROOM HEIGHT |
|---|---|
| LADDER/2000 | 106 1/4" (2700mm) |
| LADDER/2200 | 106 1/4" (2700mm) |
| LADDER/2500 | 106 1/4" (2700mm) |
| LADDER/3000 | 126" (3200mm) |
| LADDER/EXT* | |

**must be ordered when specifying a Storage Wall ladder in conjunction with sliding doors*

## Track Tops and Bottoms

Order 1 track length section to match each Storage Wall section (width) you are ordering. Tracks come in pairs, top and bottom. Color: to match unit.

| PART NO. | TRACK LENGTH |
|---|---|
| TRACK/36U | 28 1/8" (714mm) |
| TRACK/54U | 40 1/8" (1020mm) |
| TRACK/64U | 46 7/8" (1190mm) |
| TRACK/78U | 56 1/4" (1428mm) |

*Safety ladder only extends 12 5/8" from Storage Wall when folded flat.*

# Storage Wall® Doors



A variety of door options can enhance the safety and security of your stored items, while protecting items on shelves from dust and environmental grime.

## Hinged Door Sets

Protect inventory and equipment from dirt and theft with full-height hinged doors. Economical and easy to install on single or multiple Storage Wall sections. Door sets add 2" to the depth of the Storage Wall section. Requires top and bottom universal panels with mounting holes. Painted to match the unit. To specify lock, please see instructions to left.

### Hinged Door Starters

| PART NO. | HEIGHT |
|---|---|
| **Standard and ST width – 36 units** | |
| DHD2000/36SW-S-■ | 78 3/4" (2000mm) |
| DHD2200/36SW-S-■ | 86 5/8" (2200mm) |
| **HS width – 54 units** | |
| DHD2000/54SW-S-■ | 78 3/4" (2000mm) |
| DHD2200/54SW-S-■ | 86 5/8" (2200mm) |
| **Mid-width – 64 units** | |
| DHD2000/64SW-S-■ | 78 3/4" (2000mm) |
| DHD2200/64SW-S-■ | 86 5/8" (2200mm) |
| **Double width – 78 units** | |
| DHD2000/78SW-S-■ | 78 3/4" (2000mm) |
| DHD2200/78SW-S-■ | 86 5/8" (2200mm) |

### Hinged Door Adders

| PART NO. | HEIGHT |
|---|---|
| **Standard and ST width – 36 units** | |
| DHD2000/36SW-A-■ | 78 3/4" (2000mm) |
| DHD2200/36SW-A-■ | 86 5/8" (2200mm) |
| **HS width – 54 units** | |
| DHD2000/54SW-A-■ | 78 3/4" (2000mm) |
| DHD2200/54SW-A-■ | 86 5/8" (2200mm) |
| **Mid-width – 64 units** | |
| DHD2000/64SW-A-■ | 78 3/4" (2000mm) |
| DHD2200/64SW-A-■ | 86 5/8" (2200mm) |
| **Double width – 78 units** | |
| DHD2000/78SW-A-■ | 78 3/4" (2000mm) |
| DHD2200/78SW-A-■ | 86 5/8" (2200mm) |

## Sliding Door Sets

Doors move smoothly on ball bearings. Doors and track add an additional 5" to the depth and 1/4" to the height of the section. Painted to match the unit. To specify lock, please see instructions to left. Doors come as pairs, to cover even number of same-sized sections. To order doors for odd numbers of sections, contact your Lista representative.

### Sliding Door Starters

| PART NO. | HEIGHT |
|---|---|
| **Standard and ST width – 36 units** | |
| SD2000/36U-S-■ | 80 15/16" (2055mm) |
| SD2200/36U-S-■ | 88 13/16" (2255mm) |
| SD2500/36U-S-■ | 100 5/8" (2555mm) |
| SD3000/36U-S-■ | 120 5/16" (3055mm) |
| **HS width – 54 units** | |
| SD2000/54U-S-■ | 80 15/16" (2055mm) |
| SD2200/54U-S-■ | 88 13/16" (2255mm) |
| SD2500/54U-S-■ | 100 5/8" (2555mm) |
| SD3000/54U-S-■ | 120 5/16" (3055mm) |
| **Mid-width – 64 units** | |
| SD2000/64U-S-■ | 80 15/16" (2055mm) |
| SD2200/64U-S-■ | 88 13/16" (2255mm) |
| SD2500/64U-S-■ | 100 5/8" (2555mm) |
| SD3000/64U-S-■ | 120 5/16" (3055mm) |
| **Double width – 78 units** | |
| SD2000/78U-S-■ | 80 15/16" (2055mm) |
| SD2200/78U-S-■ | 88 13/16" (2255mm) |
| SD2500/78U-S-■ | 100 5/8" (2555mm) |
| SD3000/78U-S-■ | 120 5/16" (3055mm) |

### Sliding Door Adders

| PART NO. | HEIGHT |
|---|---|
| **Standard and ST width – 36 units** | |
| SD2000/36U-A-■ | 80 15/16" (2055mm) |
| SD2200/36U-A-■ | 88 13/16" (2255mm) |
| SD2500/36U-A-■ | 100 5/8" (2555mm) |
| SD3000/36U-A-■ | 120 5/16" (3055mm) |
| **HS width – 54 units** | |
| SD2000/54U-A-■ | 80 15/16" (2055mm) |
| SD2200/54U-A-■ | 88 13/16" (2255mm) |
| SD2500/54U-A-■ | 100 5/8" (2555mm) |
| SD3000/54U-A-■ | 120 5/16" (3055mm) |
| **Mid-width – 64 units** | |
| SD2000/64U-A-■ | 80 15/16" (2055mm) |
| SD2200/64U-A-■ | 88 13/16" (2255mm) |
| SD2500/64U-A-■ | 100 5/8" (2555mm) |
| SD3000/64U-A-■ | 120 5/16" (3055mm) |
| **Double width – 78 units** | |
| SD2000/78U-A-■ | 80 15/16" (2055mm) |
| SD2200/78U-A-■ | 88 13/16" (2255mm) |
| SD2500/78U-A-■ | 100 5/8" (2555mm) |
| SD3000/78U-A-■ | 120 5/16" (3055mm) |

### How to order Storage Wall doors

1. **Select door style.**

2. ■ **Select lock type.**

**RG** = individual
**KA** = keyed-alike
**MA** = master

**EXAMPLE:** to order sliding doors for a Storage Wall section that has a 2500 height vertical side frame (100 5/8" high) and is 36 units wide with an individual lock, the part number for the starter door would be **SD2500/36U-S-RG**, and the part number for the adder door would be **SD2500/36U-A-RG**.

*Full height end panel*

## Vertical Tambour Doors

Individual Storage Wall sections can be locked with vertical tambour door. Vertical door rides effortlessly on tracks mounted to the vertical side frames and retracts into a box mounted on the top of the section. The box adds 12 3/4" to the height of the unit. The additional framing for the slides and lock add 2 3/8" to the depth of the unit. Requires universal panel with mounting holes at top. Box and frame are painted to match the unit but door comes in dove gray only. To specify lock, please see instructions on page 8.

| PART NO. | TOTAL HEIGHT |
|---|---|
| **Standard and ST width – 36 units** | |
| VD1450/36U-■ | 69 7/8" (1773mm) |
| VD2000/36U-■ | 91 1/2" (2323mm) |
| VD2200/36U-■ | 99 3/8" (2523mm) |
| VD2500/36U-■ | 111 1/8" (2823mm) |
| **HS width – 54 units** | |
| VD1450/54U-■ | 69 7/8" (1773mm) |
| VD2000/54U-■ | 91 1/2" (2323mm) |
| VD2200/54U-■ | 99 3/8" (2523mm) |
| VD2500/54U-■ | 111 1/8" (2823mm) |
| **Mid-width – 64 units** | |
| VD1450/64U-■ | 69 7/8" (1773mm) |
| VD2000/64U-■ | 91 1/2" (2323mm) |
| VD2200/64U-■ | 99 3/8" (2523mm) |
| VD2500/64U-■ | 111 1/8" (2823mm) |
| **Double width – 78 units** | |
| VD1450/78U-■ | 69 7/8" (1773mm) |
| VD2000/78U-■ | 91 1/2" (2323mm) |
| VD2200/78U-■ | 99 3/8" (2523mm) |
| VD2500/78U-■ | 111 1/8" (2823mm) |

## Tambour Door Full Height End Panels

Optional end panels extend up to the top of the tambour door box to enclose the ends of the completed unit for a finished appearance. Painted to match the unit.

| PART NO. | HEIGHT | DEPTH |
|---|---|---|
| EP1450/VD | 69 7/8" | full |
| EP2000/VD | 91 1/2" | full |
| EP2200/VD | 99 3/8" | full |
| EP2500/VD | 111 1/8" | full |
| EP1450/VD/B255 | 69 7/8" | shallow |
| EP2000/VD/B255 | 91 1/2" | shallow |
| EP2200/VD/B255 | 99 3/8" | shallow |
| EP2500/VD/B255 | 111 1/8" | shallow |

## Full Height Inner Panels

Provides a clean, neat appearance, as well as added security for Storage Wall section enclosed with a door. Steel sheet panel fills entire inner area of a vertical side frame. Installs easily. Order to match height of vertical side frames. Painted to match the unit.

| PART NO. | FOR USE WITH |
|---|---|
| **Full depth – 36 units** | |
| IP1450/36U-■ | 1450VSF |
| IP2000/36U-■ | 2000VSF |
| IP2200/36U-■ | 2200VSF |
| IP2500/36U-■ | 2500VSF |
| IP3000/36U-■ | 3000VSF |
| **Shallow depth – 27 units** | |
| IP1450/27U-■ | 1450VSF/B255 |
| IP2000/27U-■ | 2000VSF/B255 |
| IP2200/27U-■ | 2200VSF/B255 |
| IP2500/27U-■ | 2500VSF/B255 |
| IP3000/27U-■ | 3000VSF/B255 |